

ZEN



*duvar ve tavan
aydınlatma* / *wall&ceiling
lighting*



TR

- Alüminyum gövde yapısı.
- Simetrik ışık dağılımı.
- PMMA cam sistemi.
- LED sistem veya LED ampül kullanımına uygun.
- Toz ve sıvı izolasyonu için conta sistemi.
- Tüm vida, somun ve pul parçaları paslanmaz çelik.
- Kullanılan komponentler CE, VDE, ENEC gibi kalite onaylarına sahip.
- Boya Rengi: Açık Gri, Gri(Antrasit), Koyu Gri, Siyah standart. RAL renkleri (Opsiyonel).
- Uygulama Alanları: Siteler, Oteller, Park Alanları, Yürüme Yolları, Alışveriş Merkezleri.

ENG



- Corrosion resistant aluminium housing.
- Symmetrical optimized lighting distribution.
- PMMA glass.
- Suitable for LED systems or LED Bulbs.
- Special sealing system for dust and liquid isolation.
- All screws, nuts and washers are stainless steel.
- All electronic components have CE, VDE, ENEC certifications.
- Color: Graphite Grey, Dark Grey and Black standard. RAL colors (Optional).
- Application Areas: Hotels, Residential Areas, Shopping Malls, Landscape Areas, Walking Paths.



Discover
the potential



Lumicro
Tel : +90.312.395 65 70
Fax : +90.312.395 65 71
İvedik O.S.B. 1459 Sokak
No: 28/1 Yenimahalle
Ankara / TÜRKİYE

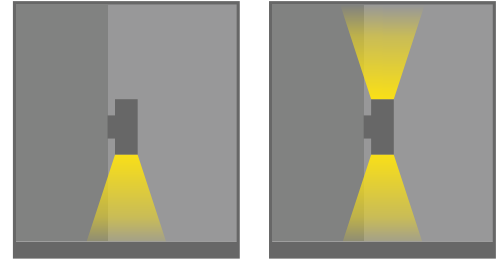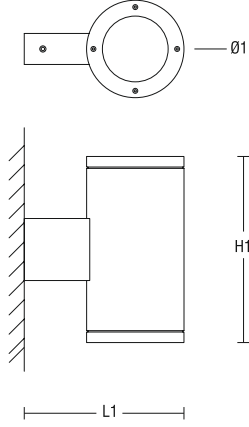

Materyal Kodu Material Code	Işıklık Luminary	Lamba Lamp	Lens Tip Lens Type	Duy Lamp Holder	Güç Power (W)	Led Işık Akısı Lumen	Işık Rengi Kelvin / nm	Ebat Dimension (mm)			IP	Class
								Ø1	L1	H1		
AL	ZEN.10.27L (Single Side)	LED	40°	E27	10	800	3.000 4.000	Ø157	260	300	IP65	Class I
	ZEN.20.27L (Double Side)				2x10	2x800						
	ZEN.10.10L (Single Side)	GU10	34°	GU10	10	975		Ø100	155	240		
	ZEN.20.20L (Double Side)				-	20						
	ZEN.M.7.10L (Single Side)				7	500						
	ZEN.M.14.10L (Double Side)				2x7	2x500						

AL : Alüminyum / Aluminium

