

VINTAGE

dekoratif aydınlatma direkleri / *decorative lighting poles*



TR

- Klasik tasarım alüminyum gövde yapısı.
- PMMA difüzör veya temperli cam kullanımına uygun (İsteğe bağlı).
- Simetrik ve asimetrik ışık dağılımlı.
- Yıvli özel tasarım çelik direk sistemi (İsteğe bağlı).
- Toz ve sıvı izolasyonu için conta sistemi.
- Tüm vida, somun ve pul parçaları paslanmaz çelik.
- İsteğe bağlı DIM seçenekleri.
- Boya Rengi: Açık Gri, Gri(Antrasit), Koyu Gri, Siyah standart. RAL renkleri (Opsiyonel).
- Uygulama Alanları: Tarihi Alanlar, Siteler, Oteller, Park Alanları, Yürüme Yolları, Alışveriş Merkezleri, Meydanlar.

ENG

- Traditional designed corrosion resistant aluminium housing.
- Suitable for PMMA diffuser or tempered glass (Optional).
- Asymmetrical or symmetrical light distribution.
- Special designed grooved galvanized steel poles system (Optional).
- Special sealing system for dust and liquid isolation.
- All screws, nuts and washers are stainless steel.
- Optional DIM systems.
- Color: Graphite Grey, Dark Grey and Black standard. RAL colors (Optional).
- Application Areas: Traditional Sites, Hotels, Residential Areas and Landscape Areas, Squares.




Discover
the potential






Lumicro


Tel : +90.312.395 65 70
Fax : +90.312.395 65 71
İvedik O.S.B. 1459 Sokak
No: 28/1 Yenimahalle
Ankara / TÜRKİYE

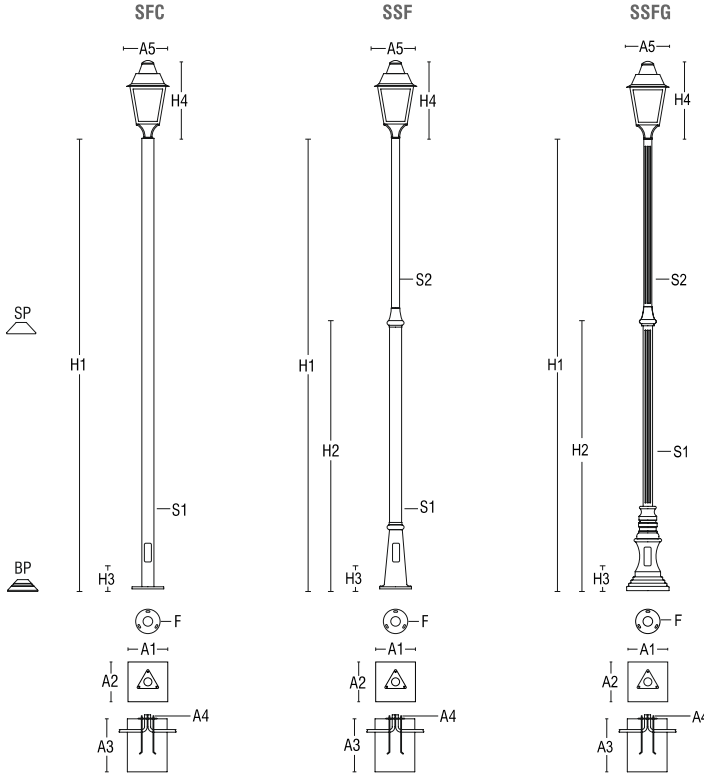

Asimetrik / Asymmetric

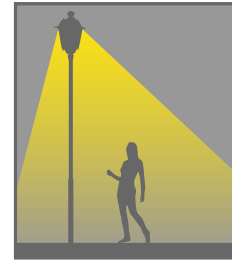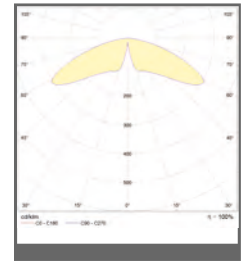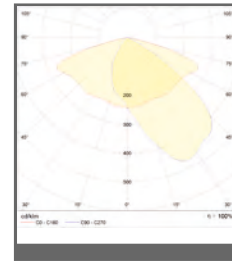

Asimetrik / Asymmetrical

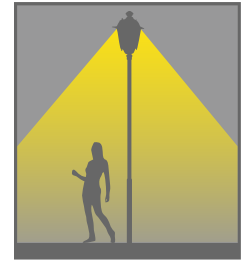

Simetrik / Symmetrical



Işıklık Luminary	Lamba Lamp	Lens Tipi Lens Type	Güç Power (W)	Led Işık Akısı Lumen	Led Işık Rengi Kelvin/nm	Ebat Dimension (mm)		IP	Class
						A5	H4		
VIN.24L	2x12 LUMICRO LED MODULE 350mA	IP66 Silikon Contalı Yol Aydınlatma Tipi IP66 Silicon Seal With Street Lens	30	3.120	3.000 4.000	400 x 400	760	IP44 IP65*	Class I
VIN.36L	3x12 LUMICRO LED MODULE 350mA	IP66 Silikon Contalı Yol Aydınlatma Tipi IP66 Silicon Seal With Street Lens	45	4.680					
VIN.40L	COB LED	IP65 Glass 120°	40	4.000					

* Led Module

Lumicro Direk Tipi Lumicro Poles Type	Ebat Dimension (mm)				Ankraj Anchorage - Dimension (mm)				
	H1	H3	S1	F	A1	A2	A3	A4	Adet - Qty
SFC Çelik Düz Flanşlı Direk (Steel Poles with Flange)	3.000	450	Ø89	Ø230x8	400	400	400	M12x330	4
	4.000								
SFG Çelik Düz Yivli Flanşlı Direk (Grooved Steel Poles with Flange)	3.000	450	Ø89	Ø230x8	400	400	400	M12x330	4
	4.000								

Lumicro Direk Tipi Lumicro Poles Type	Ebat Dimension (mm)						Ankraj Anchorage - Dimension (mm)				
	H1	H2	H3	S1	S2	F	A1	A2	A3	A4	Adet / Qty
SSF Çelik Kademeli Flanşlı Direk (Stepped Steel Poles with Flange)	4.000	1.000	200	Ø114	Ø76	Ø230x8	400	400	400	M12x330	3
	5.000	2.000									4
SSFG Çelik Yivli Kademeli Flanşlı Direk (Grooved Stepped Steel Poles with Flange)	4.500	1.500	200	Ø114	Ø76	Ø230x8	400	400	400	M12x330	3
	5.000	2.000									4

