

OFFICE LINE



iç mekan / *indoor*
aydınlatma / *lighting*



TR

- Alüminyum ekstrüzyon gövde yapısı.
- Mimari alanlarda farklı tasarım opsiyonları.
- Maksimum ışık geçirgenliği sağlayan difüzör sistemi.
- Sıva üstü veya sarkıt kullanım imkanı.
- Farklı uzunluklarda üretim imkanı.
- Simetrik ışık dağılımı.
- Tüm vida, somun ve pul parçaları paslanmaz çelik.
- Sabit güç veya DIM sistem.
- Gövde Rengi: Açık Gri, Gri (Antrasit), Koyu Gri, Siyah standart. RAL renkleri (Opsiyonel).
- Uygulama Alanları: İç Mekan Uygulamaları.

ENG

- Corrosion resistant extruded aluminium housing.
- Different design options for the special applications.
- High light transmittance with a white opal diffuser.
- Ceiling or suspended options.
- Different size options.
- Symmetrical lighting distribution.
- All screws, nuts and washers are stainless steel.
- Stand alone or DIM systems.
- Housing Color: Graphite Grey, Dark Grey and Black standard. RAL colors (Optional)
- Application Areas: Indoor Applications.





Discover
the potential



Lumicro

Tel : +90.312.395 65 70
Fax : +90.312.395 65 71
İvedik O.S.B. 1459 Sokak
No: 28/1 Yenimahalle
Ankara / TÜRKİYE

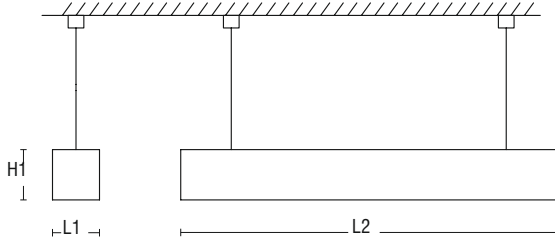

Materyal Kodu Material Code	Işıklık Luminary	Lamba Lamp	Güç Power (W)	Led Işık Akısı Lumen	Işık Rengi Kelvin / nm	Ebat Dimension (mm)			IP	Class
						L1	L2	H1		
AL	OFl.L.21L.5080	LED	21	2.380	3.000 4.000	50	1.000	80	IP20	Class II
	OFl.L.42L.5080		42	4.760						
	OFl.L.21L.7580		21	2.380		75				
	OFl.L.42L.7580		42	4.760						
	OFl.L.21L.6060		21	2.380		60		60		
	OFl.L.42L.8585		42	4.760		85		85		
	OFl.L.45L.8585		63	7.140						
	OFl.L.21L.5575		21	2.380		55		75		
	OFl.L.42L.5575		42	4.760						
	OFl.L.21L.6585		21	2.380		65		85		
	OFl.L.42L.6585		42	4.760						
	OFl.L.21L.6545		21	13.300						

AL : Alüminyum / Aluminium

