

NEO MINI

bolard / *bollard*
aydınlama / *lighting*

TR

- Alüminyum ekstrüzyon profil gövde yapısı.
- Asimetrik ve simetrik ışık dağılımı.
- LED sistem veya LED ampül kullanımına uygun.
- Tüm vida, somun ve pul parçaları paslanmaz çelik.
- Farklı boylarda üretim seçeneği.
- Kullanılan komponentler CE, VDE, ENEC gibi kalite onaylarına sahip.
- Boya Rengi: Açık Gri, Gri (Antrasit), Koyu Gri, Siyah standart. RAL renkleri (Opsiyonel).
- Uygulama Alanları: Siteler, Oteller, Park Alanları, Yürüme Yolları, Alışveriş Merkezleri.

ENG

- Corrosion resistant extruded profile aluminium.
- Asymmetrical or symmetrical optimized light distribution.
- Suitable for LED systems or LED Bulbs.
- All screws, nuts and washers are stainless steel.
- Different height options.
- All electronic components have CE, VDE, ENEC certifications.
- Color: Graphite Grey, Dark Grey and Black standard. RAL colors (Optional).
- Application Areas: Hotels, Residential Areas, Shopping Malls, Landscape Areas, Walking Paths.



Discover
the potential




Lumicro




Tel : +90.312.395 65 70
Fax : +90.312.395 65 71

İvedik O.S.B. 1459 Sokak
No: 28/1 Yenimahalle
Ankara / TÜRKİYE

Tip - 1
Type - 1

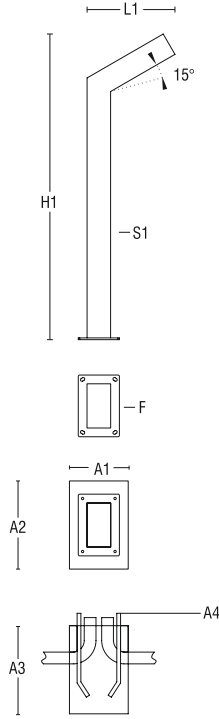

Tip - 2
Type - 2

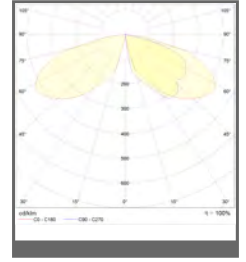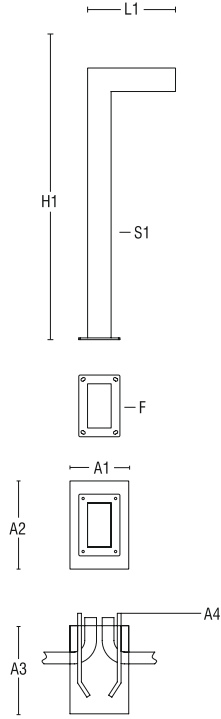

Materyal Kodu Material Code	Lumicro Direk Tipi Lumicro Poles Type	Işıklık Luminary	Lamba Lamp	Güç Power (W)	Led Işık Akısı Lumen	Led Işık Rengi Kelvin / nm	Ebat Dimension (mm)				IP	Class
							S1	H1	L1	F		
ALD	Alüminyum Profil (Aluminium Profile)	NEO.M.12L	LED	15	1.560	3.000	150x80	1.000	300	220 x 320 x 6	IP65	Class I

ALD : Alüminyum Profil Direk / Aluminium Profile Poles

Ankraj Anchorage - Dimension (mm)				
A1	A2	A3	A4	Adet / Qty
250	250	300	M8x250	4

